


Whisperline® Console Water Source Heat Pump



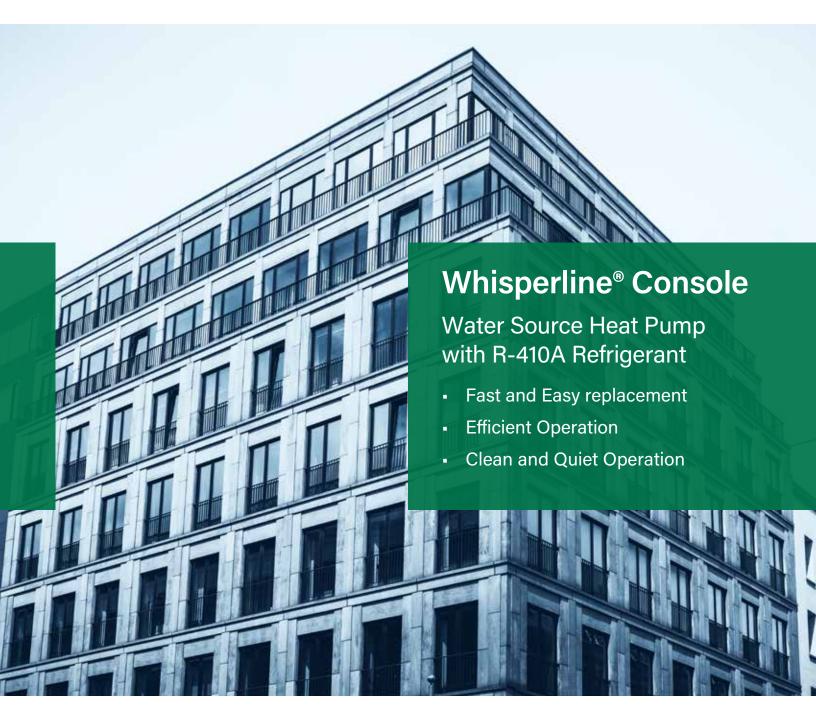

Whisperline® Console Water Source Heat Pump

The Whisperline® WCS series water source heat pump console unit provides environment friendly, high efficiency, cooling and heating where individual, quiet control of space is a priority.

The WCS series is designed with the growing retrofit market in mind, making it an ideal choice for renovation or new construction projects. The unit cabinet is powder-painted appliance-grade steel and includes an attractive extruded aluminum grille and control door.

The WCS series has two chassis sizes, small (models 08, 10 and 12), and large (models 15 and 18). Quality components, careful design and testing, and the latest in environmentally friendly technology advances assure long life, user satisfaction, and lower energy cost.



- Made in the USA
- Designed for easy installation and compatibility.
- ETL approved
- Quiet, durable, and efficient compressor with built-in pressure and temperature protection
- Heavy gauge G90 galvanized steel construction
- Powder-painted drain pan
- High efficiency copper tube-aluminum fin evaporator coil
- High efficiency coaxial condenser coil with low water-side pressure drop
- Unit-mounted digital controls



- Electronic control board with anti-short cycle protection
- High pressure switch
- · Frost-free cooling
- Water coil freeze protection
- Refrigerant circuit access ports
- Capillary expansion
- Positive shift reversing valve
- Precision charged with R-410A refrigerant
- 1/2 Inch water connections
- Electrostatic air filter

Electrical Data*

	Compressor	Voltage	Fan		Compressor		Total	Ckt	Max	Min
Model	Type	Volt-Hz-Ph	Amps	HP	RLA	LRA	Amps		Fuse	Volts
WCS-08	Rotary	115/60/1	1.2	1/10	6.1	39.1	7.3	9.0	15	104
WCS-08	Rotary	208-230/60/1	0.4	1/10	3.0	15.0	3.4	5.0	15	197
WCS-08	Rotary	265/60/1	0.4	1/10	2.7	11.0	3.1	4.0	15	240
WCS-10	Rotary	115/60/1	1.2	1/10	8.0	50.0	9.2	11.5	15	104
WCS-10	Rotary	208-230/60/1	0.4	1/10	4.4	20.0	4.8	6.0	15	197
WCS-10	Rotary	265/60/1	0.4	1/10	3.4	21.0	3.7	5.0	15	240
WCS-12	Rotary	115/60/1	1.2	1/10	9.5	50.0	10.7	14.0	20	104
WCS-12	Rotary	208-230/60/1	0.4	1/10	4.7	25.0	5.1	7.0	15	197
WCS-12	Rotary	265/60/1	0.4	1/10	4.2	22.0	4.6	6.0	15	240
WCS-15	Rotary	208-230/60/1	0.6	1/10	5.6	29.0	6.2	8.0	15	197
WCS-15	Rotary	265/60/1	0.6	1/10	5.0	28.0	5.6	7.0	15	240
WCS-18	Rotary	208-230/60/1	0.6	1/10	7.4	33.0	8.0	10.0	15	197
WCS-18	Rotary	265/60/1	0.6	1/10	6.0	28.0	6.6	9.0	15	240

^{*} If optional electric heat is selected see Electric Heat Ratings Table: Total Amps, Ampacity and Fuse is the larger Value.

Electrical Heat Ratings* (Boilerless)

Heater No.	Volt	Watts	Btuh	HTR Amps	Total HTR Amps	Min Ckt Amps	Max Fuse
	208	1,000	3,400	4.8	5.4	7	15
1	230	1,220	4,160	5.3	5.9	7	15
	277	1,000	3,400	3.6	4.2	5	15
	208	2,000	6,820	9.6	10.2	13	15
2	230	2,450	8,350	10.7	11.3	14	15
	277	2,000	6,820	7.3	7.9	10	15

^{*}Optional

Benefits that Make a Big Difference

When you consider all of the features of Whisperline® Consoles, it's easy to see why they deliver so many benefits to contractors and users alike.

The WCS Series is the perfect solution for new construction and replacement projects the competition can't match. The Whalen Company backs the WCS with a customer friendly one-year parts and labor warranty and five-year compressor warranty.

Damage Protection

The standard high-pressure switch and evaporator coil freeze protection, in conjunction with the electronic control board, stops unit operation before damage occurs, should airflow become reduced or obstructed due to dirty filters, obstructed airflow, or motor failure. A freezestat protects the water coil from freeze damage due to water temperature or flow problems. The water coil is designed for low water-side pressure drop, eliminating potential

pump sizing and water flow problems. High efficiency compressors provide demonstrated reliability and low sound levels and cut energy costs.

Fast and Easy Replacement

Because the WCS dimensions and construction details were established with retrofit projects in mind, replacement work is fast and easy. With the compact footprint and a cabinet height short enough to fit under window sills, the need for expensive room renovation, redecorating, or piping & wiring changes is eliminated. The WCS is the solution that gets your property back in service quickly and at the lowest total cost.

Optional Chassis Only

These console units are offered as chassis-

only to work with the existing or custom room cabinets or with a new cabinet for a complete installation. The chassis contains the compressor, air side heat exchanger, water side heat exchanger, evaporator fan motor, and control and safety components.

Options and Accessories

- Room cabinet (LH and RH available)
- Flow control valve
- Electric or hydronic heat
- Control options
- Valves and unions
- · Line cords
- Boilerless
- Hose kits
- · Customer-specified custom features
- Low temp option

Performance Ratings

Model	Cool Btuh	Sens Btuh	EER	Heat Btuh	СОР	CFM Hi/Lo	GPM	Coil PD	Refrigerant
WCS-08	7,800	6,000	14.0	9,200	4.4	300/250	2.0	1.2'	R-410A
WCS-10	10,600	8,000	13.6	12,100	4.6	395/330	2.5	1.8'	R-410A
WCS-12	11,500	9,400	12.4	14,000	4.3	400/350	3.0	2.5'	R-410A
WCS-15	14,700	10,700	13.8	16,100	4.3	475/400	3.8	4.6'	R-410A
WCS-18	17,800	13,700	13.1	21,000	4.4	540/420	4.5	3.3'	R-410A

Continuous engineering improvements may result in performance changes without notice.

Unit Sizes

Model	A	В	С	D	E	F	G	н	Chassis Weight
	Inches								(lbs)
WCS-08	44 9/16	10 3/4	8 7/8	37 3/4	6 1/4	2 5/8	10 1/4	23 5/16	116
WCS-10	44 9/16	10 3/4	8 7/8	37 3/4	6 1/4	2 5/8	10 1/4	23 5/16	118
WCS-12	44 9/16	10 3/4	8 7/8	37 3/4	6 1/4	2 5/8	10 1/4	23 5/16	120
WCS-15	54 9/16	12 9/16	10 7/8	42 3/4	10 3/4	3 1/2	12 1/8	24	145
WCS-18	54 9/16	12 9/16	10 7/8	42 3/4	10 3/4	3 1/2	12 1/8	24	155

NEMA Configurations Non Locking Plugs/Receptacles

Voltage	125V	250V	277V
15A Recp.	5-15R	6-15R	7-15R
15A Plug	5-15P	6-15P	7-15P
20A Recp.	5-20R	6-20R	7-20R
20A Plug	5-20P	6-20P	7-20P
30A Recp.	5-30R	6-30R	7-30R
30A Plug	5-30P	6-30P	7-30P

277V Line cord N/A as factory installed

