

PACKAGED WATER-TO-AIR HEAT PUMP

The Closetline® WC Compact series from The Whalen Company boasts a compact cabinet, making this heat pump system the perfect solution for commercial retrofit or new construction applications. The Closetline® WC Compact series far exceeds the ASHRAE 90.1 minimum efficiency and utilizes environmentally friendly R-454B low GWP refrigerant to reduce operating costs without compromising the environment. Closetline® water source heat pumps are popular in a variety of building applications where quiet operation in a compact footprint is a key requirement.

True to our commitment to offer equipment that's flexible enough to meet the design of the building rather than forcing a building to conform to limitations of the equipment, our Closetline® packaged water source heat pumps can be applied to virtually any type of building.

With a wide range of internal options, they are particularly advantageous for new construction or renovation of apartments, condominiums, hotels, senior living facilities, dormitories and office buildings.




Closetline® WC Compact Performance Ratings - EC Motor

Model	CFM	GPM	Water Loop Heat Pump				Ground Loop Heat Pump			
			Cooling 86°F		Heating 68°F		Cooling 77°F		Heating 32°F	
			Capacity Btuh	EER Btuh / W	Capacity Btuh	COP	Capacity Btuh	EER Btuh / W	Capacity Btuh	COP
WC**006	225	1.5	6,100	15.0	8,300	5.1	6,400	17.7	4,800	3.3
WC**009	325	2.3	8,600	14.3	11,600	4.5	9,000	16.7	7,200	3.3
WC**012	380	3.0	10,700	13.4	14,400	4.6	11,500	14.9	9,300	3.3
WC**015	525	3.8	14,700	16.4	15,900	4.9	15,200	17.3	10,700	3.6
WC**018	600	4.5	18,000	15.0	21,500	5.1	19,400	17.3	13,800	3.6
WC**024	800	6.0	24,900	15.4	28,500	5.1	25,800	18.0	19,000	3.7
WC**030	1000	7.5	29,200	14.5	35,000	4.8	30,500	17.3	23,000	3.6
WC**036	1150	9.0	35,200	15.3	43,500	4.8	36,400	17.4	27,900	3.6
WC**042	1400	10.5	41,800	15.2	48,500	4.9	43,400	17.4	31,700	3.5
WC**048	1550	12.0	48,900	15.2	57,500	4.8	50,800	17.6	38,100	3.5
WC**060	2000	15.0	60,200	14.7	68,000	4.7	62,200	17.4	44,300	3.5

Closetline® WC Compact Series


Closetline® WC Compact Horizontal Dimensions

Model	Overall Cabinet			Blower Discharge Supply		Weight
	W	D	H	X	Y	
WCH*006	19.10	34.10	11.10	6.6	4.1	103
WCH*009	19.10	34.10	11.10	6.6	4.1	105
WCH*012	19.10	34.10	11.10	6.6	4.1	114
WCH*015	20.10	43.00	17.00	9.6	13.1	153
WCH*018	20.10	43.00	17.00	9.6	13.1	158
WCH*024	20.10	43.00	18.30	13.1	9.6	174
WCH*030	20.10	43.00	18.30	13.1	9.6	182
WCH*036	20.10	47.10	21.00	16.1	10.9	203
WCH*042	20.10	47.10	21.00	16.1	10.9	218
WCH*048	24.10	54.10	21.00	18.1	13.3	263
WCH*060	24.10	54.10	21.00	18.1	13.3	278

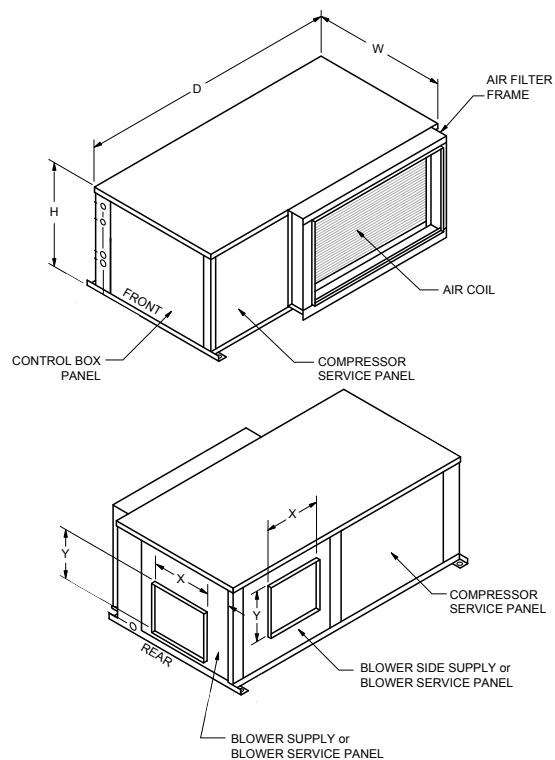

Closetline® WC Compact Vertical Dimensions

Model	Overall Cabinet			Blower Discharge Supply		Weight
	W	D	H	X	Y	
WCV*006	19.10	19.00	22.00	9.0	9.0	103
WCV*009	19.10	19.00	22.00	9.0	9.0	105
WCV*012	19.10	19.00	22.00	9.0	9.0	114
WCV*015	21.60	21.50	40.00	14.0	14.0	153
WCV*018	21.60	21.50	40.00	14.0	14.0	158
WCV*024	21.60	21.50	40.00	14.0	14.0	189
WCV*030	21.60	21.50	40.00	14.0	14.0	197
WCV*036	21.60	26.00	45.00	14.0	14.0	203
WCV*042	21.60	26.00	45.00	14.0	14.0	218
WCV*048	25.50	29.30	50.50	16.0	18.0	315
WCV*060	25.50	29.30	50.50	16.0	18.0	330

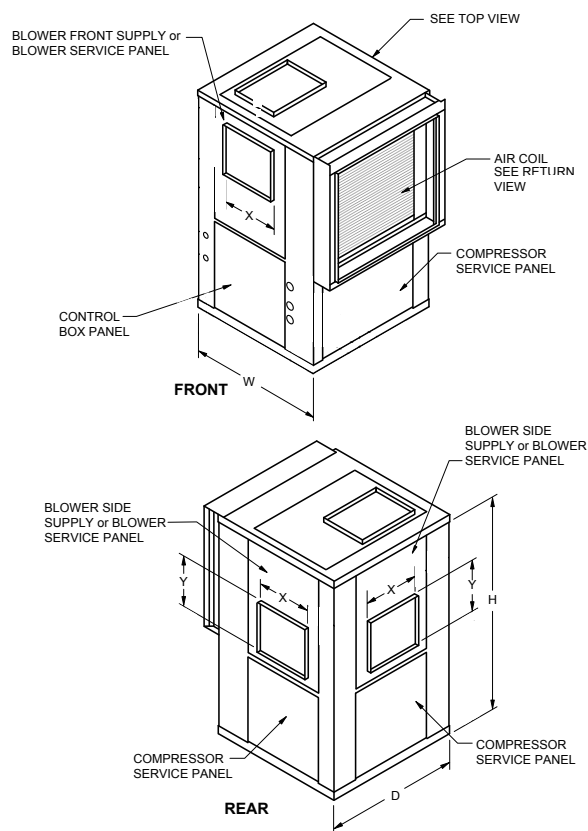

P.O. Box 1390 • Easton, MD 21601 USA
whalencompany.com

Closetline is a registered trademark of The Whalen Company. ©2014 The Whalen Company. All rights reserved.



WL017 rev. 09-24